

Windsock Instructions

Using a hobby carefully poke a hole through the material at the top of the windsock ring for the 4 mounting bolts. You'll see the 4 bolt holes through the material. Make sure to make an opening in the material on both sides of the ring to allow the bolts to pass through.




The windsock support and top pole mount bolt together as shown.



Pass the top mount and bolts through the ring from outside to inside as shown.



The windsock support slides into the pocket on the inside. Make sure to insert into the pocket as shown so that there are two layers of material between the support and the top of the windsock.

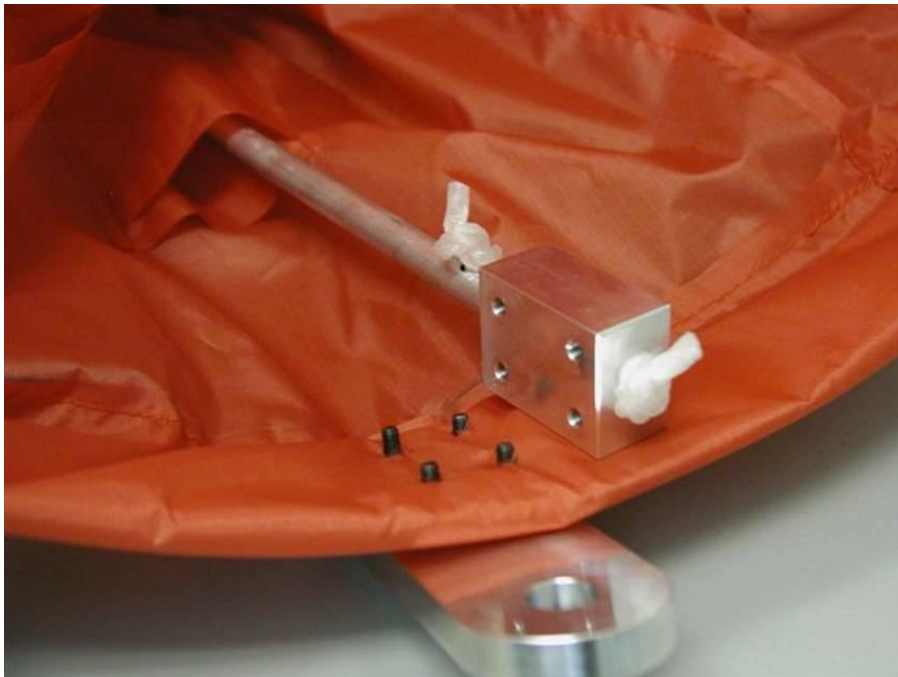

Using a 3mm driver secure the top mount and support.



The top mount is secured to the pole mount with two washers and cotter pin as shown.





The top mount is threaded into a pole (not provided) with the pole passing through the rope loop and then attaching the top mount.

